

Template Assembly Tips

- 1) Trim 1/2" to 3/4" from each edge to be joined. (This step is optional.)
- 2) Place 2 pages to be joined on a light board, or hold them against a window lit
- 3) Line up registration marks and apply clear tape along the seam to join the pag
- 4) Repeat with other 2 pages, then join both sets of pages together. +

3

12x12-in
Pin Loom Te
with
Custom Pin S


Pin Count = 285

optional.)

in front of a window lit from behind.

Use the template to join the pages.

Number of pages: +

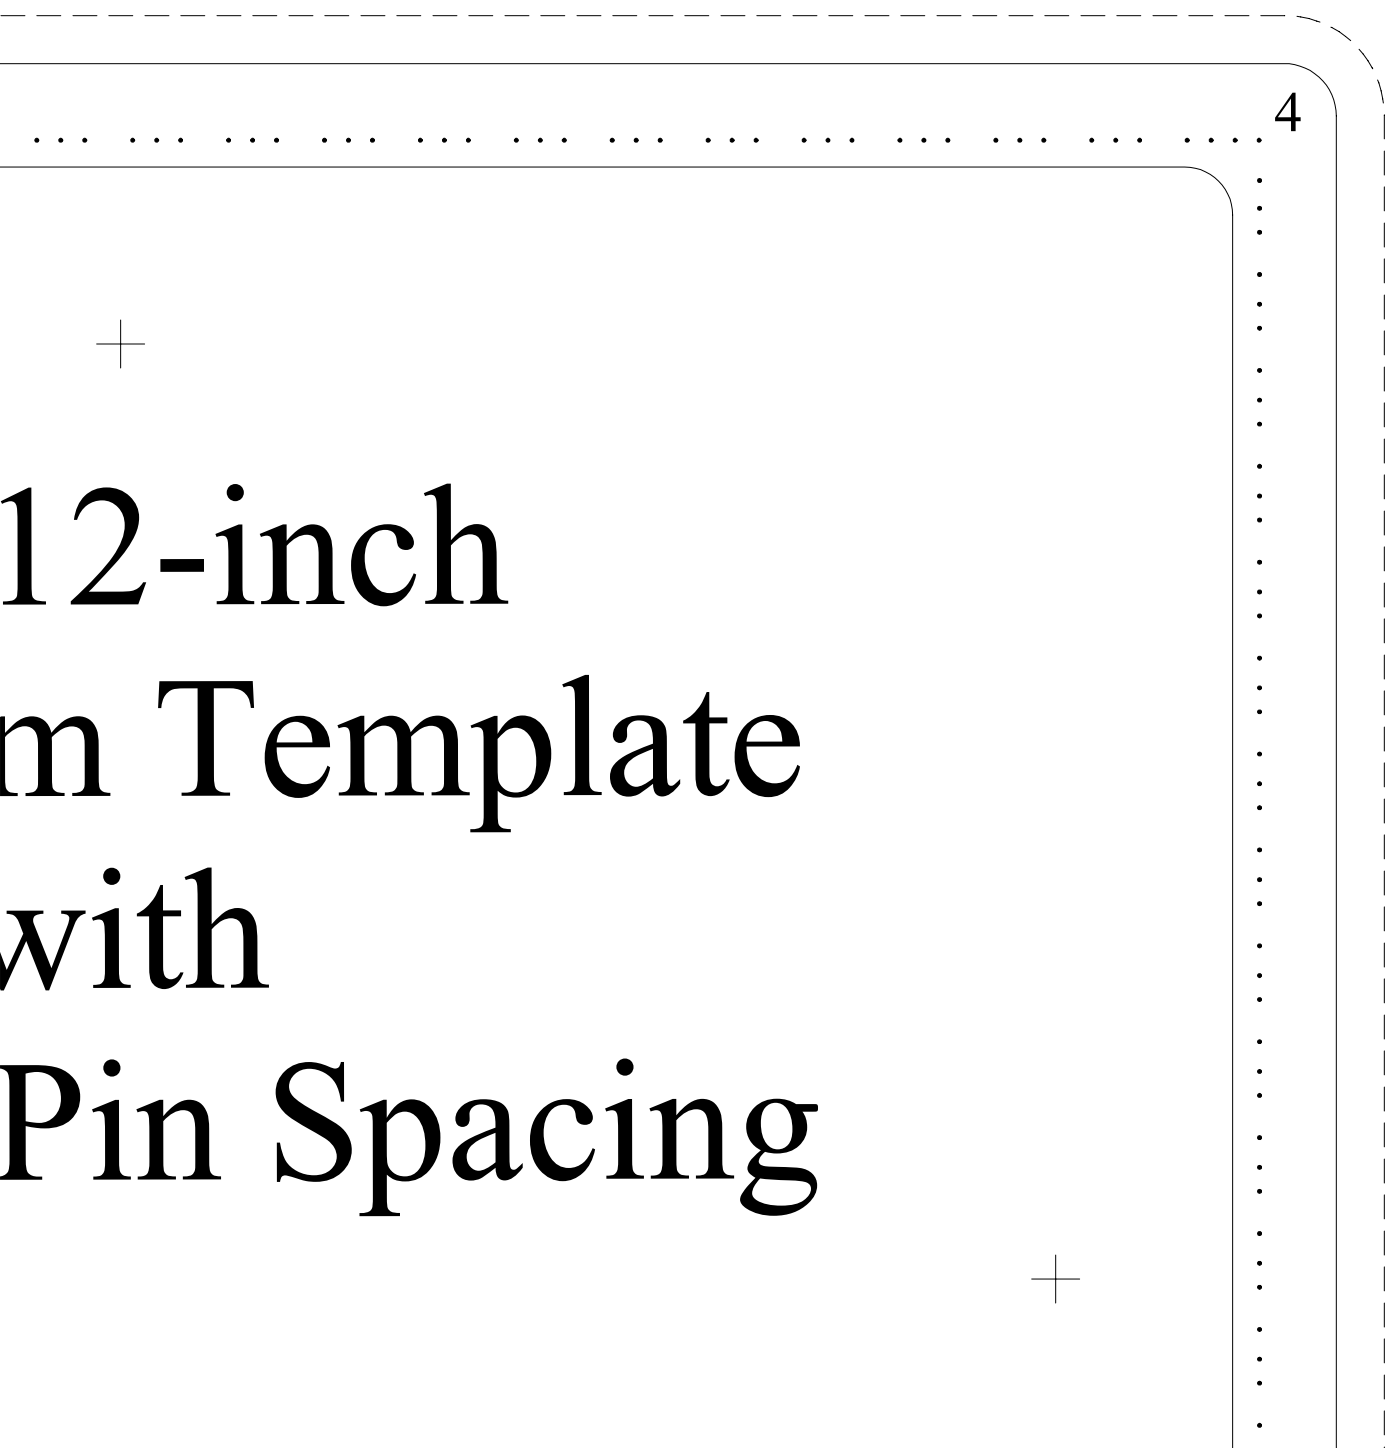

4

12-inch
m Template
with
Pin Spacing

+

+

Custom Pin S

Pin Count = 285

Pin Diameter = .04" to .06"
1.0mm to 1.5mm

Pin Spacing

Nominally 1/8" (0.125") or
but increased by .03" or .76mm
must pass between adjacent

Pin Spacing

.044" to .044"
1.12mm to 1.12mm

(.125") or 3.175mm on center,
.03" or .762mm where needle
in adjacent pins